

# Glass Door Freezers Swing Door Series

EC1GDF / EC2GDF / EC3GDF

## Features

- \* Exterior - heavy duty painted steel
- \* Interior - white painted aluminium, stainless steel 304 inner floor
- \* ETL Safety, ETL Sanitation approved
- \* CFC free refrigerant and foam
- \* Danfoss / Embraco compressor
- \* Ventilated, automatic defrosting and evaporation of condensation water
- \* Ebm fans, cold air circulation is strongly forced by fan to enable quick refrigeration effect and balanced temperature
- \* LED light
- \* Digital temperature controller : Carel (Italy)
- \* Round interior corners for easy cleaning
- \* Self-closing glass door fitted with easy to clean, replaceable magnetic balloon gaskets
- \* PVC coated adjustable shelves
- \* Fixed strip for price tags
- \* Castors with brake

## Options

- \* Adjustable legs
- \* Additional shelving/shelf brackets



# Glass Door Freezers Swing Door Series

EC1GDF / EC2GDF / EC3GDF






EC1GDF



EC2GDF



EC3GDF

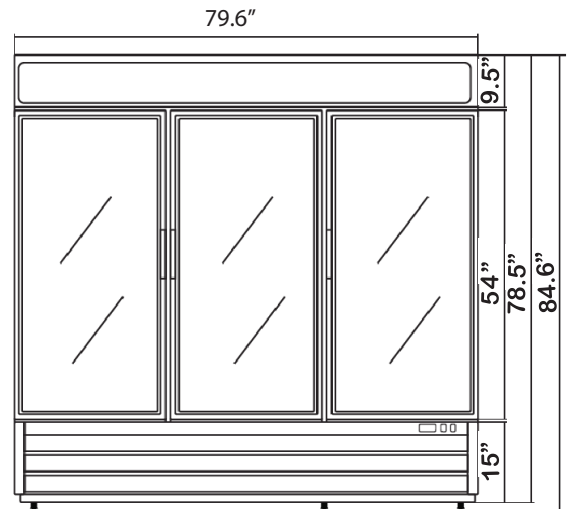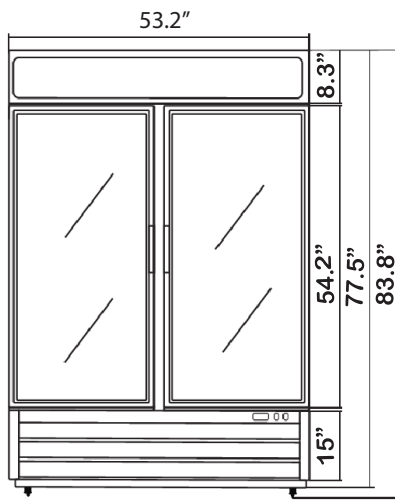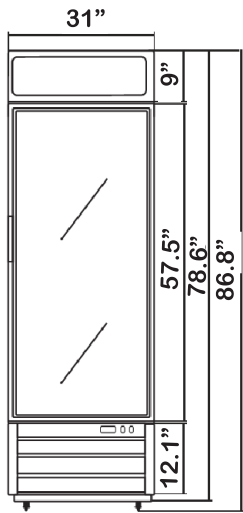

MODEL NUMBER	EXTERNAL DIMS (IN) W X D X H	VOLTAGE / FREQUENCY	AMPS (A)	NET WEIGHT (LBS)	INPUT POWER (W)	TEMPERATURE RANGE (°C)
EC1GDF	31 x 32.4 x 86.8	115 V / 60 HZ	7.6	364	732	(-23) - (-18)
EC2GDF	53.2 x 32.2 x 83.8	115 V / 60 HZ	10.6	452	1000	(-23) - (-18)
EC3GDF	79.6 x 30.6 x 84.6	115 V / 60 HZ	20 (requires 2 plugs)	860	1950 (requires 2 plugs)	(-22) - (-18)

\* Specifications are subject to change without notice.

\*\*All measurements are approximates.

\*\*\*All equipment designed to operate in controlled environment below 75°F (+24°C) temperature and HR 55% relative humidity